




The ENDURO engines, true working machines, offer an unparalleled price/performance ratio and can withstand the most extreme conditions of use, and it is no coincidence that YAMAHA Enduro engines are used in the vast majority of traditional fishing canoes.

E75BMHDL



TECHNICAL CHARACTERISTICS	E75BMHDL
MOTOR	
Engine Type	In-line 2
Reduction ratio	4.5 :1
Start-up	Manual
Power system	3 Carburetors
Lubrication system	Pre-Mixing 2 %
Fuel consumption (L/h-tr/min)	34.0 L/h @5500 r/min
Fuel	Regular Gasoline
Full throttle operating range (tr/min)	4500-5500
Max.Prop Shaft Horsepower (Kw)	55.2 (75 hp)
Bore x Stroke (mm)	82.0 X 72.0
Architecture	L3
Displacement (cc)	1140
MORE	
Propeller Rotation	Clockwise
Alternator	10 A
Control	Tiller handle
DIMENSIONS	
Engine transom height (mm)	L : 521 mm (20.5 in)
Dry weight with propeller (kg)	121

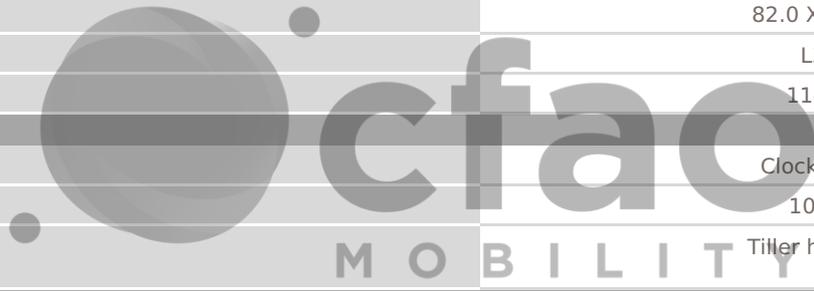

Always wear a helmet, eye protection and protective proper clothing.
 CFAO encourages you to ride safely with responsible manners that comply with all laws while respecting the environment.

